

ACCEPTED VENDORS: FBM/SPI CO.

MATERIAL: CLOSED CELL ELASTOMERIC NBR/PVC FOAM

COLOR: BLACK

BACKING: PRESSURE SENSITIVE ADHESIVE


SPECIFICATION COMPLIANCE:

-ASTM C534 TYPE 2, GRADE 1

-FLAME RESISTANCE PER ASTM E84 CLASS A

| REVISION HISTORY | | | | | |
|------------------|-----|--|--------|------------|----------|
| DATE | REV | DESCRIPTION | AUTHOR | CHECKED BY | APPROVED |
| 7/11/17 | A | INITIAL RELEASE | EW | LS | JT |
| 7/3/18 | B | ARMACELL REMOVED FROM MANUFACTURER, K-FLEX ONLY | ZA | LS | EW |
| 12/10/18 | C | FIXED -2 PART NO. WAS 6RSXG3X428 NOW 6RSXG3X4028 | ZA | LS | ZA |

| PART NO. | MANUFACTURER PART NO. | THICKNESS |
|----------|-----------------------|-----------|
| -1 | K-FLEX: 6RSXG3X4018 | .125" |
| -2 | K-FLEX: 6RSXG3X4028 | .250" |

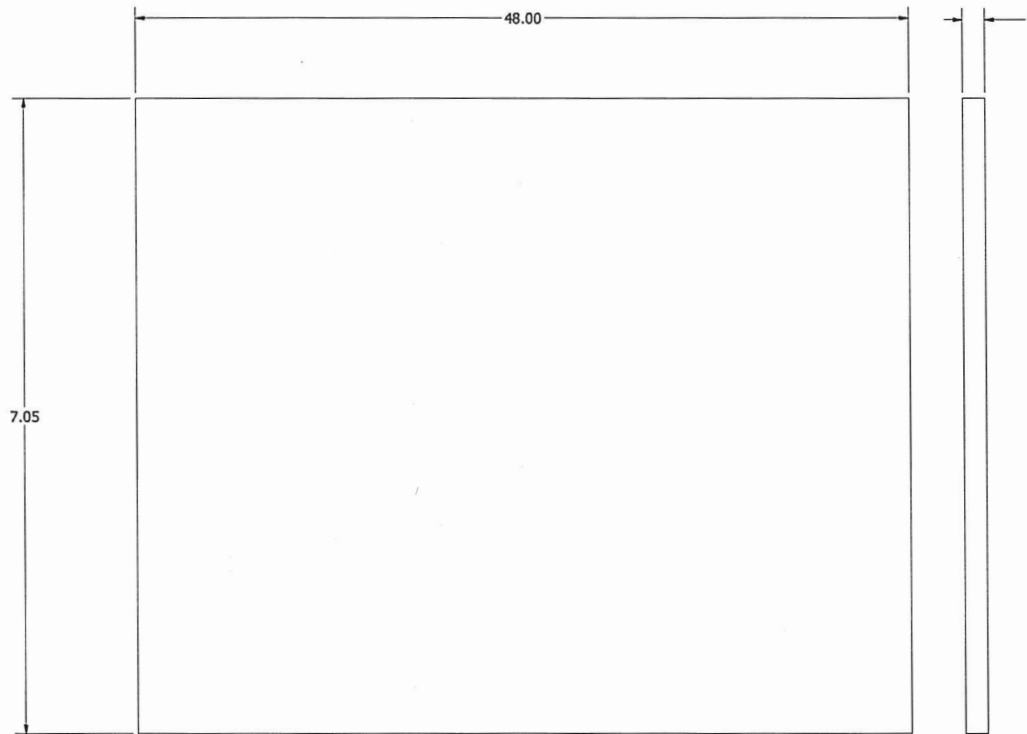

-CONFIDENTIAL INFORMATION-
THE INFORMATION AND DATA CONTAINED HEREIN IS
PROPRIETARY AND IS SUBMITTED IN CONFIDENCE AND
SHALL NOT BE DISCLOSED, USED OR REPRODUCED FOR ANY
PURPOSE WHATSOEVER WITHOUT THE PRIOR WRITTEN
PERMISSION OF PARAVION TECHNOLOGY, INC.

PROTO

| | | | | | |
|---|--|---|-------------------|---------------------------|-----------------|
| Paravion [®] Technology Inc. | | TITLE FOAM SHEET | | DRAWING NUMBER ES00135 | |
| DIMENSIONS IN INCHES TOLERANCES EXCEPT WHERE NOTED: .X = ±.1 .XX = ±.05 .XXX = ±.010 ANGLES ± .1° | | DRAWN BY EW | CHK'D BY LS | APP'D BY JT | DATE 7/11/17 |
| THREADS INTERNAL CLASS 2B EXTERNAL CLASS 2A | | DO NOT SCALE DRAWING © 2019 PARAVION TECH INC. PARAVION IS A TRADEMARK OF PARAVION TECHNOLOGY INC. | | REV C | ECO 1 OF 1 |